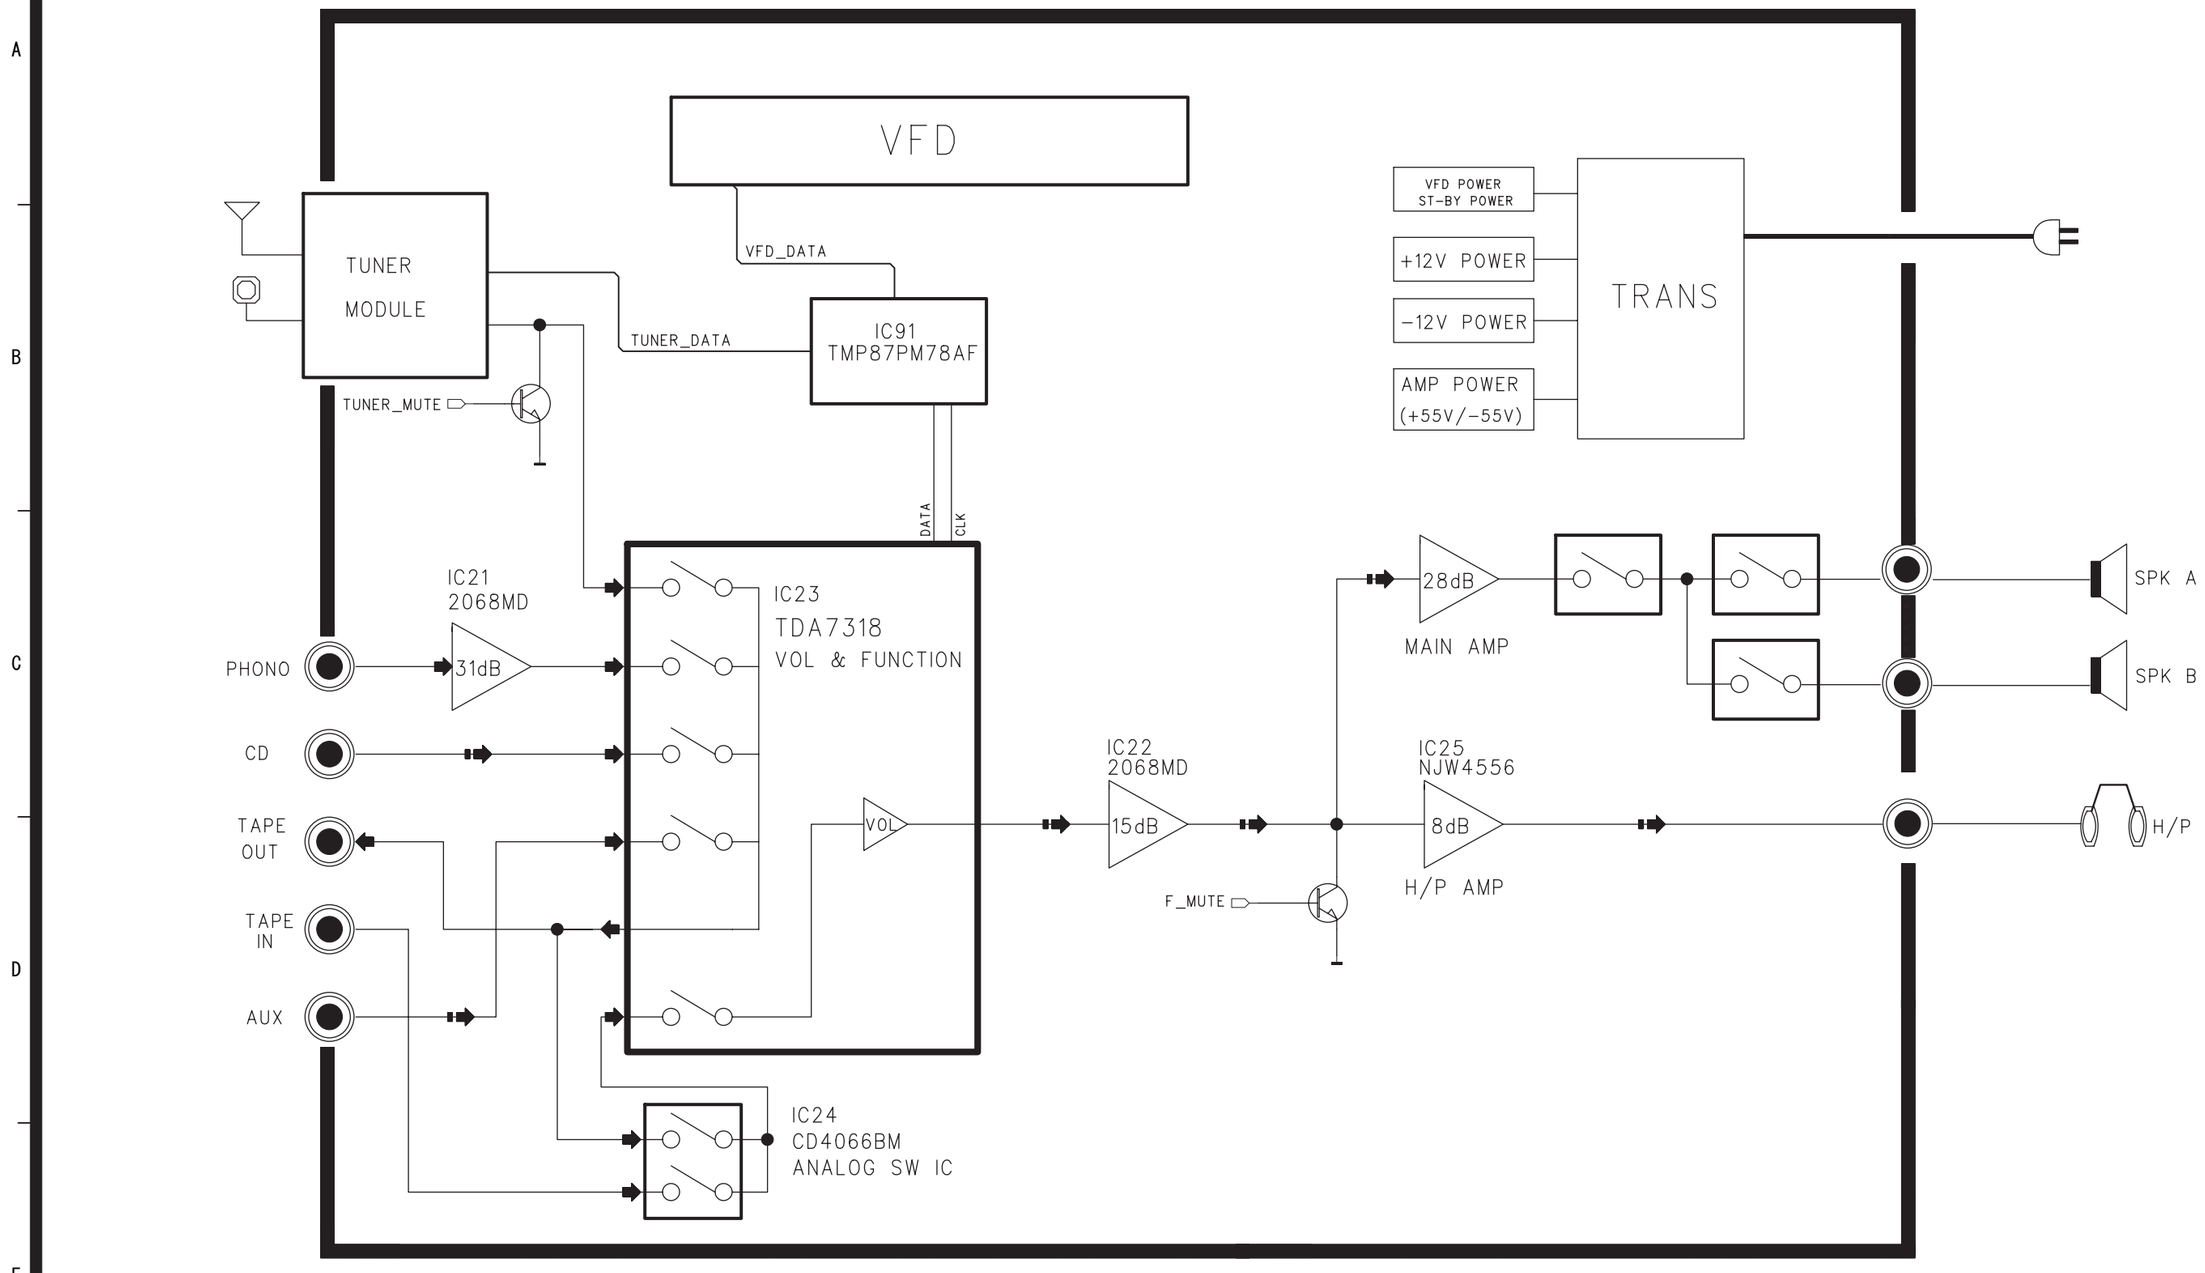

AG-790A

AM/FM STEREO Receiver

1st Issue: September 2005

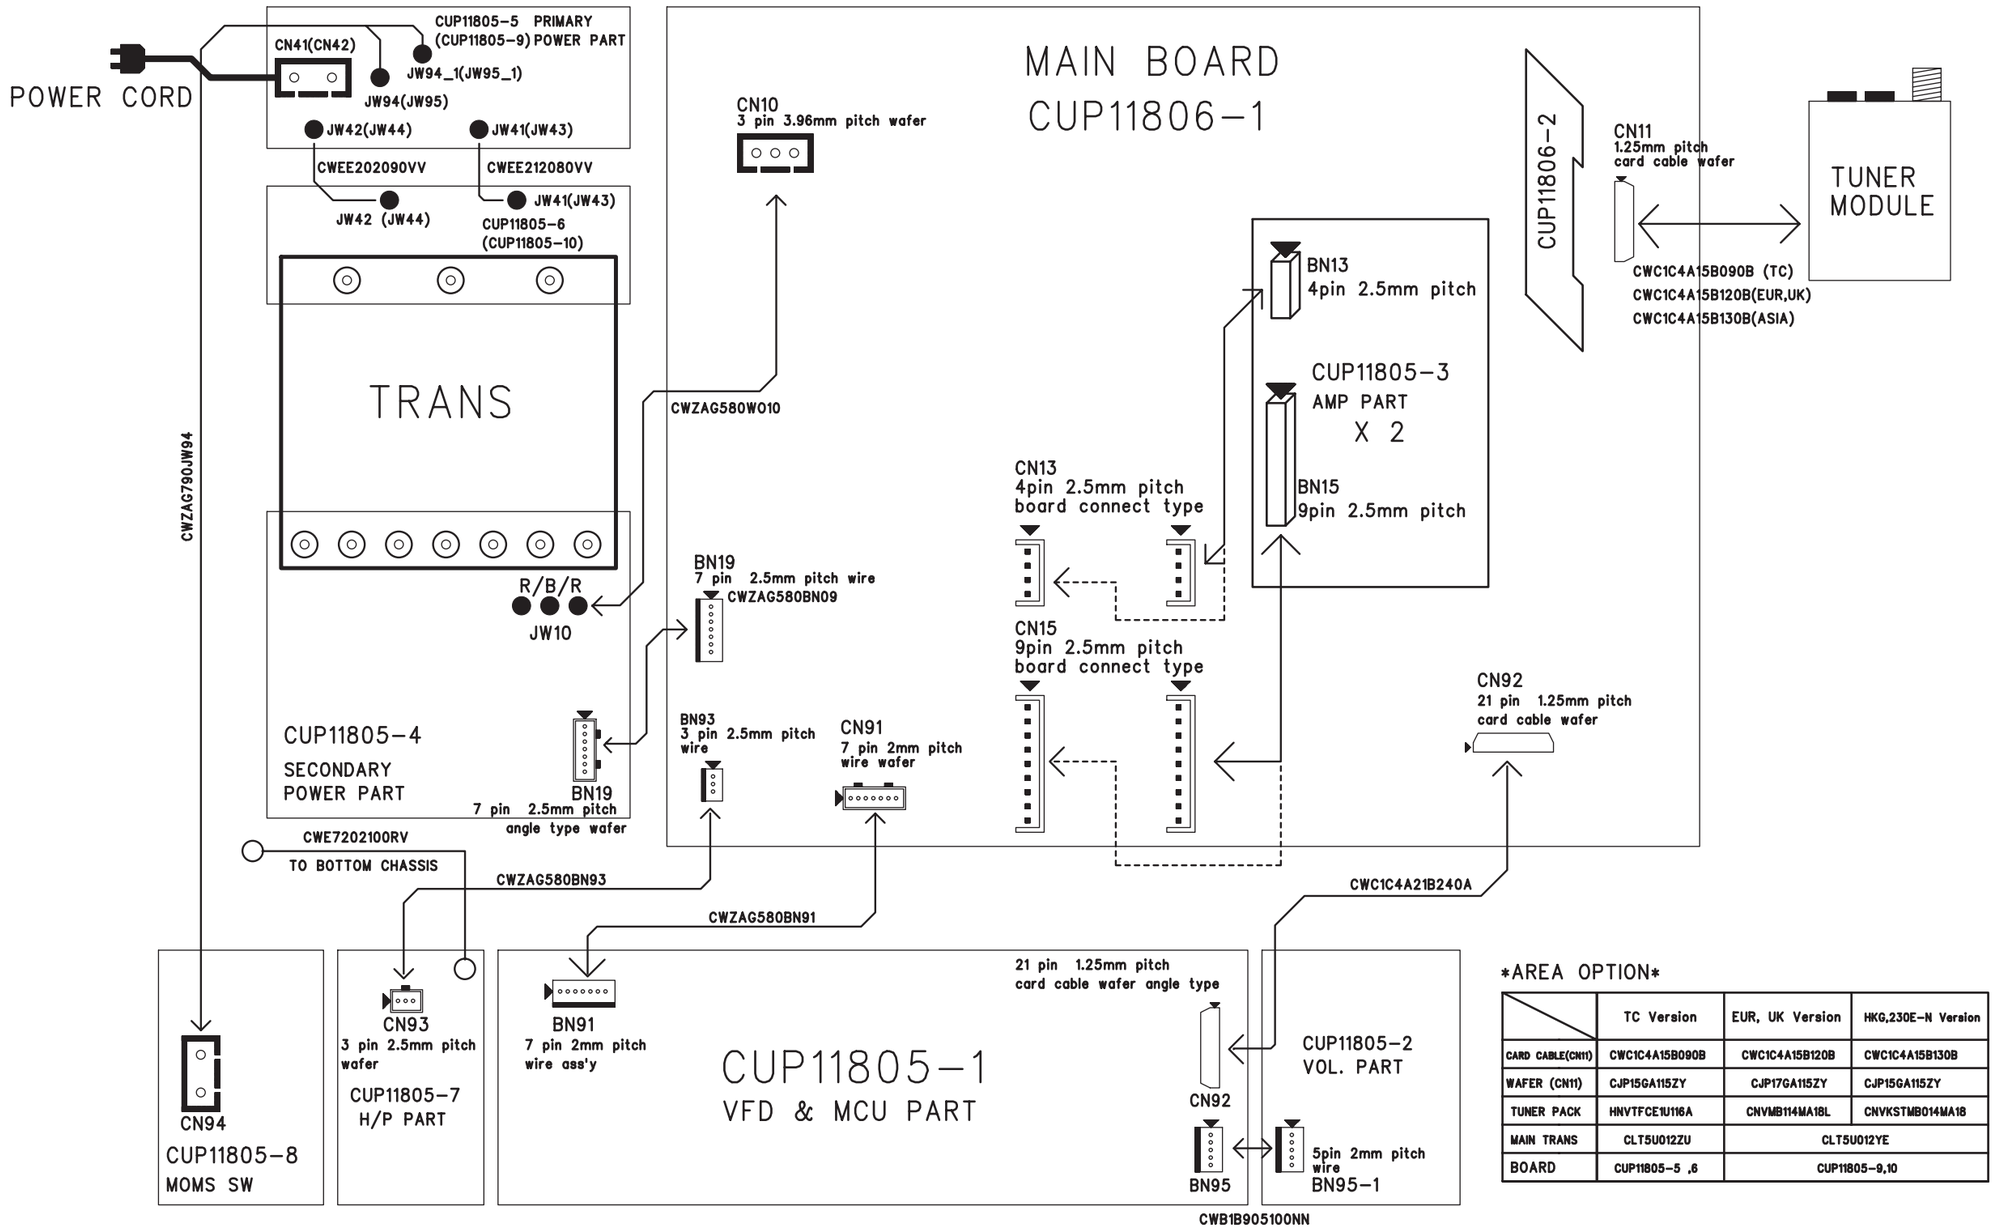

AREA OPTION

	TC Version	EUR, UK Version	HKG,230E-N Version
CARD CABLE(CN11)	CWC1C4A15B090B	CWC1C4A15B120B	CWC1C4A15B130B
WAFER (CN11)	CJP15GA115ZY	CJP17GA115ZY	CJP15GA115ZY
TUNER PACK	HNVTFCE1U116A	CNVMB114MA18L	CNVKSTMB014MA18
MAIN TRANS	CLT5U012ZU	CLT5U012YE	
BOARD	CUP11805-5 ,6	CUP11805-9,10	

AG-790A

AM/FM STEREO Receiver

1st Issue: September 2005

TEAC SCHEMATIC DIAGRAM AG-790A VFD & MICOM PCB

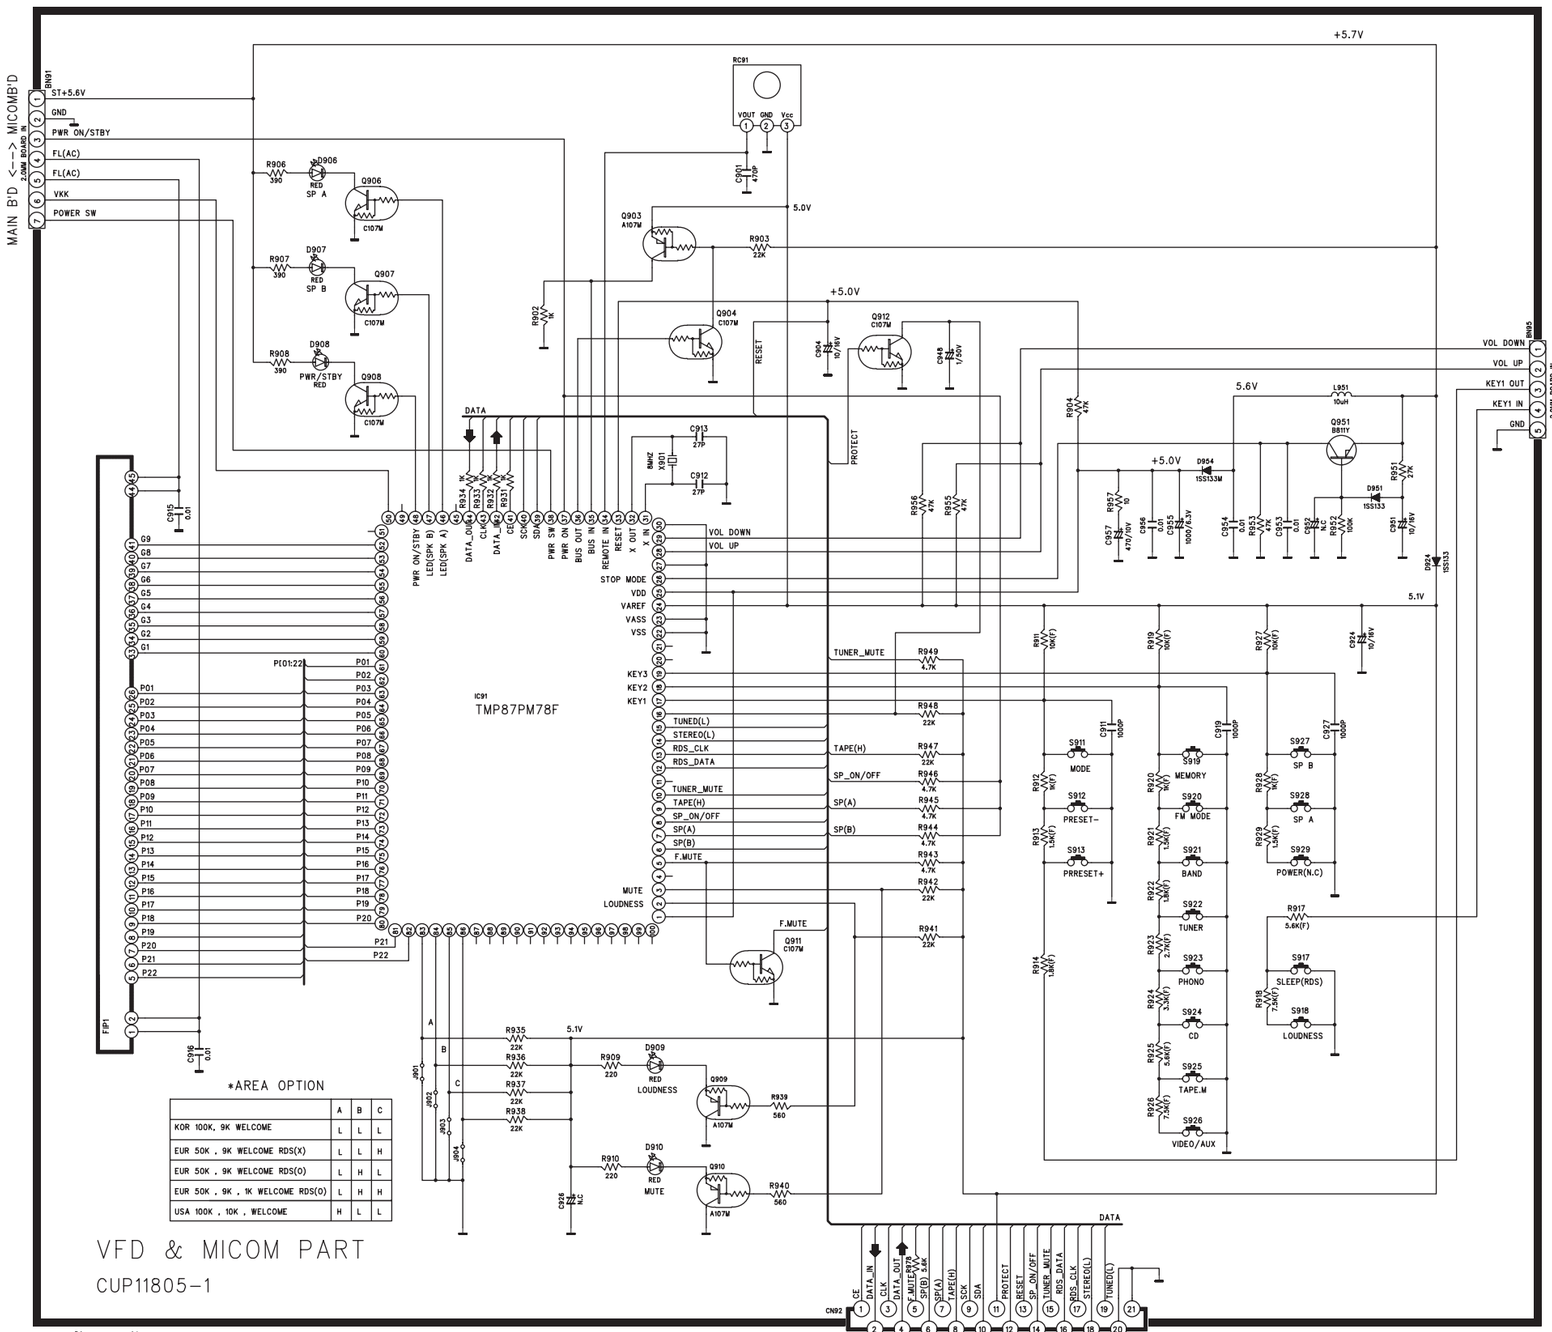

NOTES:
1. Resistor values are in ohms (k=kilo-ohms, M=megohms).
2. Capacitor values are in microfarads (p=picofarads).
3. ⚠Parts marked with this sign are safety critical components. They must always be replaced with identical components-refer to the appropriate parts list and ensure exact replacement.

AG-790A

AM/FM STEREO Receiver

1st Issue: September 2005

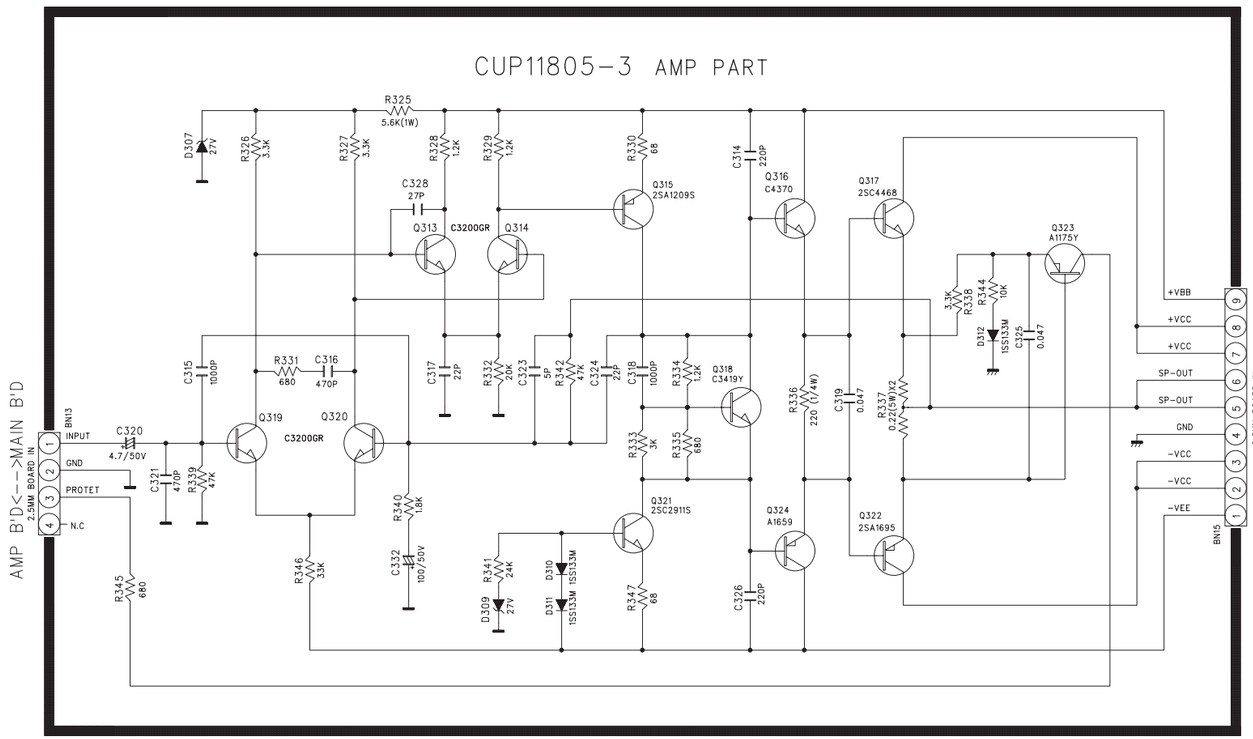

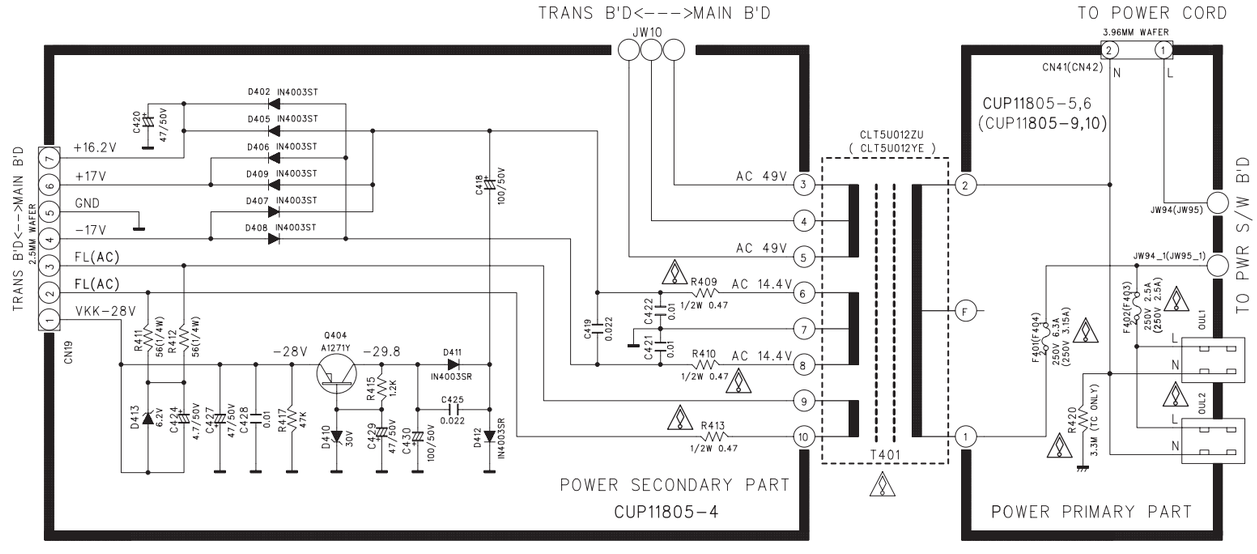

AREA OPTION

	TC Ver.	EUR,UK,HKG,230E-N Ver.
BOARD	CUP11805-5,6	CUP11805-9,10
WAFER	CN41	CN42
WIRE	JW94 ,JW94_1	JW95, JW95_1
FUSE	F401 , F402	F403 , F404
OUTLET	OUL1	OUL2
TRANS	CLT5U012ZU	CLT5U012YE

NOTES:
1. Resistor values are in ohms (k=kilo-ohms, M=megohms).
2. Capacitor values are in microfarads (p=picofarads).
3. ⚠Parts marked with this sign are safety critical components. They must always be replaced with identical components-refer to the appropriate parts list and ensure exact replacement.

AG-790A

AM/FM STEREO Receiver

1st Issue: September 2005

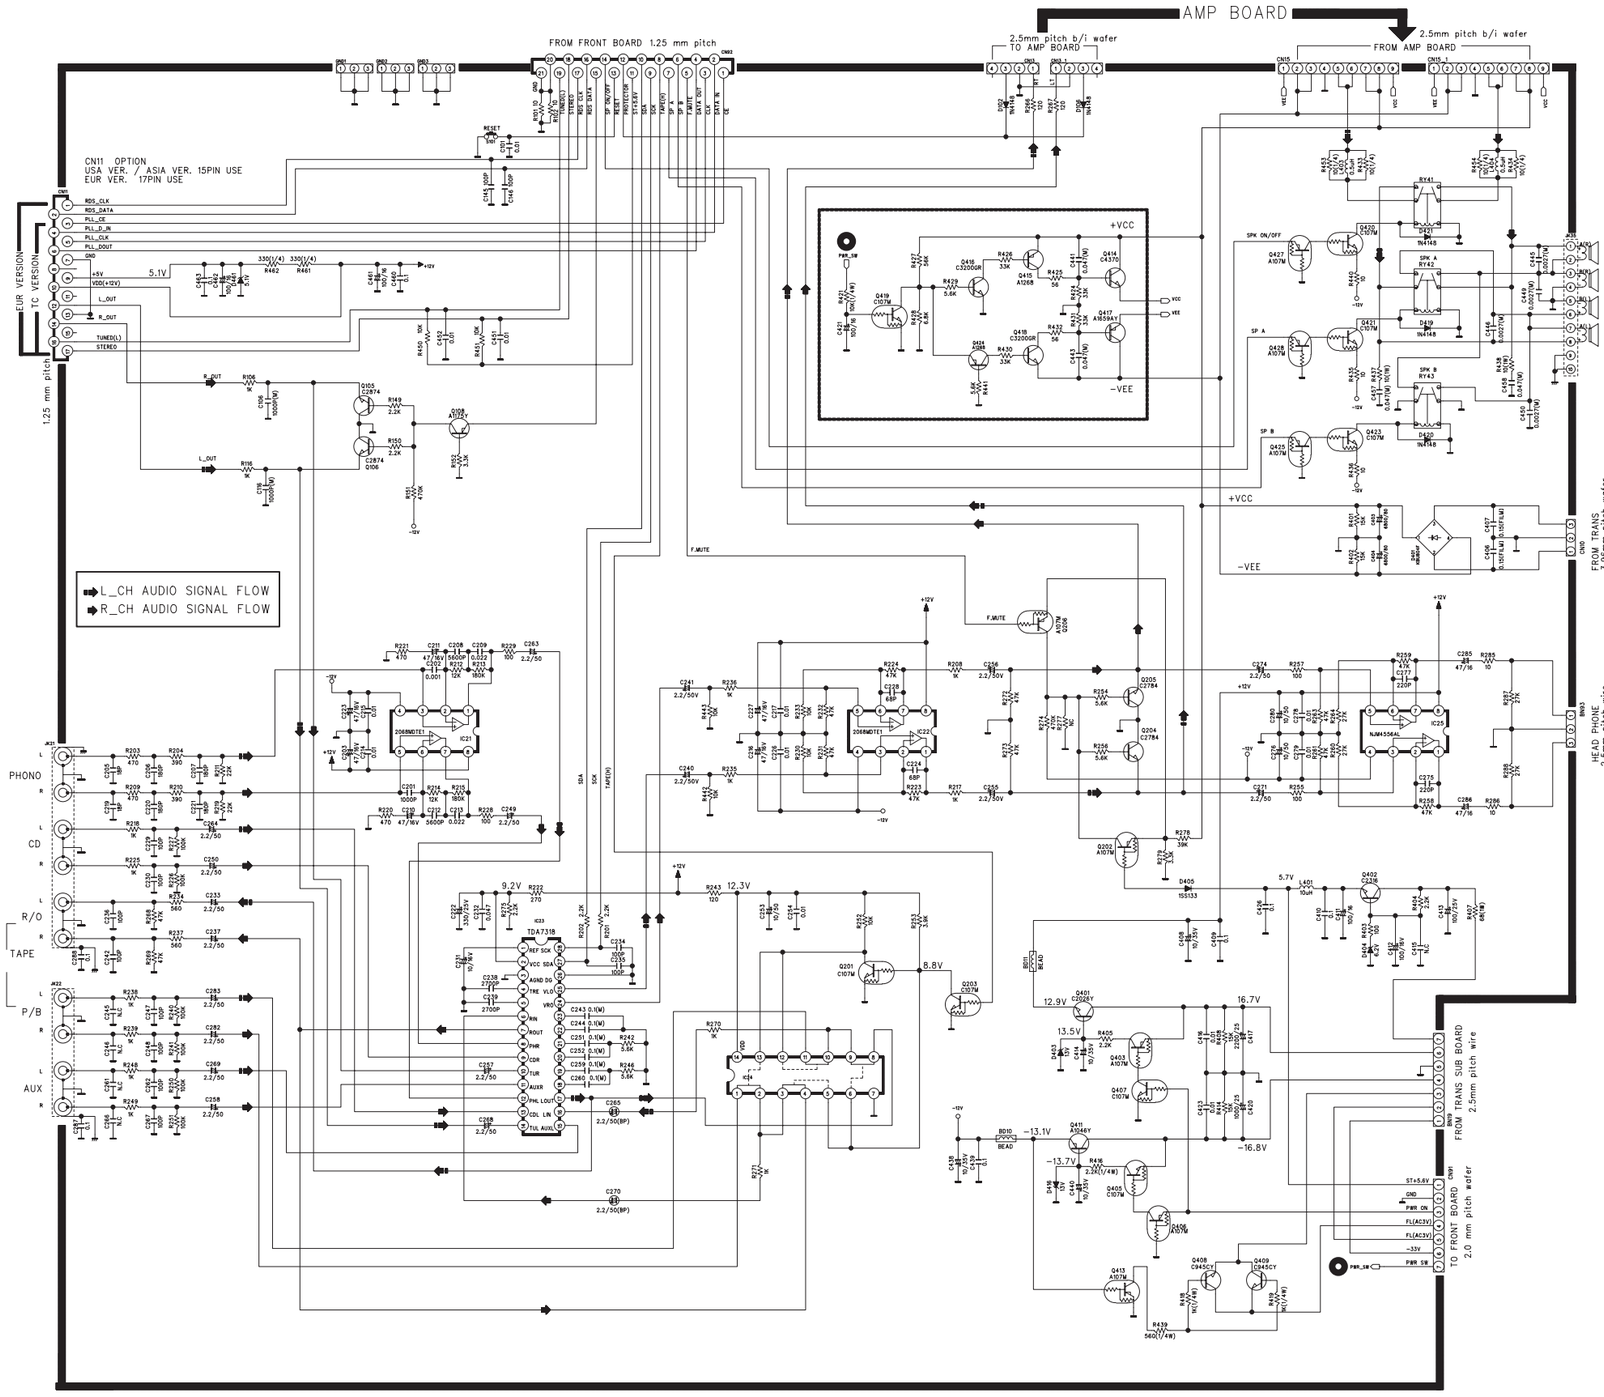

NOTES:
1. Resistor values are in ohms (k=kilo-ohms, M=megohms).
2. Capacitor values are in microfarads (p=picofarads).
3. ⚠Parts marked with this sign are safety critical components. They must always be replaced with identical components-refer to the appropriate parts list and ensure exact replacement.

AG-790A

AM/FM STEREO Receiver

1st Issue: September 2005